

P-TENTS



Chinese

English

French

German

Hungarian

Italian

Russian

Slovenian

Spanish

Turkish

mobile space solutions
www.roder.com




RÖDER P-TENTS REQUIREMENTS & SOLUTIONS

<p>800 m² USABLE AREA</p> <p>2 Weeks TIME FRAME</p> <p>900 PERSONS</p> <p>10,0 x 12,0 m Bodega (3 Pcs.) 3,0 x 9,0 m Bodega (3 Pcs.) 3,0 x 6,0 m Bodega (3 Pcs.) TENT TYPE</p> <p>Glass facades and transparent tarpaulins SPECIAL FEATURES</p> <p>Science of the market Staatstheater in Mainz</p>	<p>1.000 m² USABLE AREA</p> <p>4 Weeks TIME FRAME</p> <p>3,0 x 72,0 m Party tent (2 Pcs.) 3,0 x 72,0 m Party tent TENT TYPE</p> <p>Anchor-free compact floor SPECIAL FEATURES</p> <p>Storage room for a fair in Hannover</p>	<p>120 m² USABLE AREA</p> <p>6,0 x 18,0 m Party tent TENT TYPE</p> <p>Door system SPECIAL FEATURES</p> <p>Sales room extension for a beverage shop</p>	<p>250 m² USABLE AREA</p> <p>1 Week TIME FRAME</p> <p>120 PERSONS</p> <p>8,0 m MEGA QUATTRO TENT TYPE</p> <p>cream colored tarpaulin with window Interior cladding and cassette floor SPECIAL FEATURES</p> <p>Wedding location in Switzerland</p>	<p>70 m² USABLE AREA</p> <p>60 PERSONS</p> <p>10,0 m Octagonal with pavilion roof TENT TYPE</p> <p>Wooden floor SPECIAL FEATURES</p> <p>Extension of a restaurant in Mallorca</p>	<p>1.100 m² USABLE AREA</p> <p>3 Days EVENT DURATION</p> <p>800 VISITORS</p> <p>10,0 x 30,0 m Part tent (3 Pcs.) TENT TYPE</p> <p>Club celebration of a national football team</p>
---	---	---	--	--	---



» CLASSIC, LIMITLESS AND PRESENT

With a wide variety of tent shapes, flexible and modular spans, lengths and heights, as well as an extensive range of accessories RÖDER P-TENTS are represented all over the world.

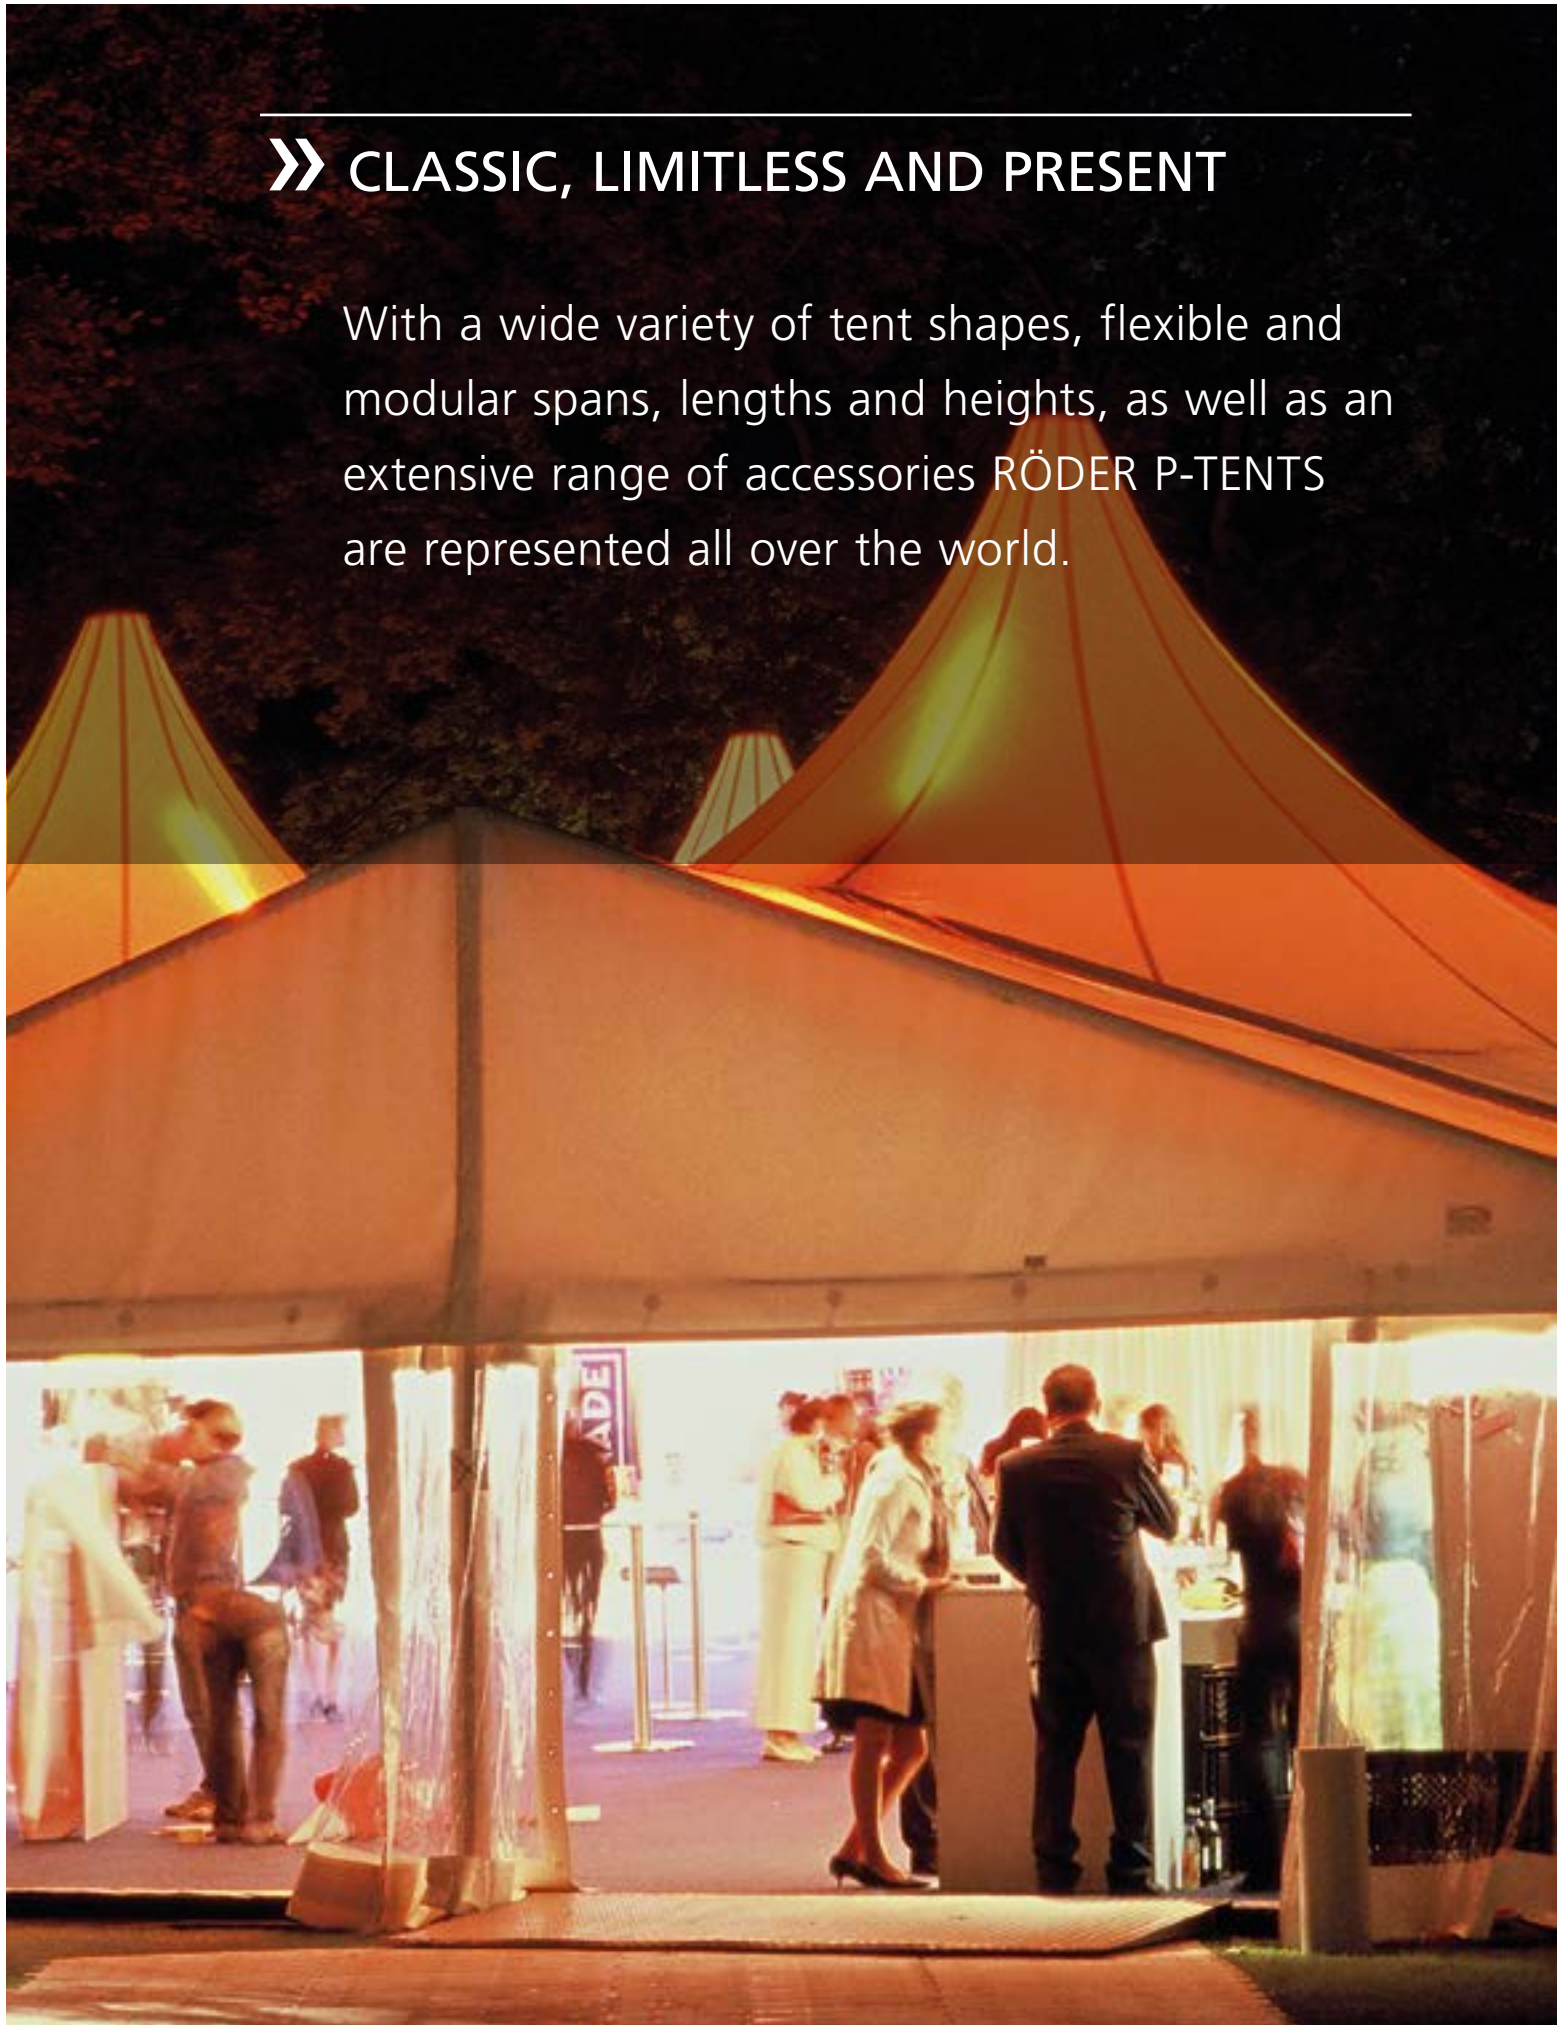

RÖDER P-TENTS

ATMOSPHERIC AND ADAPTABLE

We, the group RÖDER, put on the claim that most people already had contact with a tent system of RÖDER P- TENTS series in their lives. The classical systems offer freedom in design and implementation. As a customizable space solution with flexible and modular spans, lengths and heights they are both flexible and versatile across the globe .

The tent systems of the P-TENTS series persuade visually, economically and with safety. Due to the sustainable mobility and their elaborate designs, the systems can be installed quickly and at almost any location within a very short time. With special fixing devices for the four-channel profile system technical or decorative items can be installed safely and easily.

In addition to the **Party tent, Hexagonal, Octagonal, Mega Uno, Mega Duo, Mega Terz, Mega Quattro, Bodega and Bodega SP** the RÖDER Group offers an extensive range of accessories for extensions and options. Its portfolio ranges of facade elements, special doors and gates, various floor systems above ground, heating and lighting systems to custom-made furnishings.

Come and speak to us in person to find out which tent or marquee system best meets your requirements. The RÖDER team looks forward to helping you find the perfect accommodation!



» WIDE RANGE OF APPLICATIONS

RÖDER P-TENTS provide space for the design and realization of ideas and projects. The flexible tent systems adapt through their mobility and variability in at each spatial requirement.



POSSIBLE APPLICATIONS

FAMILY EVENT SPORTFESTIVAL RIDING BOXES
CONCERTS COMPANY EVENTS ANNIVERSARY FAIRS
PRODUCT PRESENTATIONS FESTIVALS VIP-EVENTS
CORPORATE-EVENTS SALES PROMOTION **EXHIBITIONS** **EVENTS**
FESTIVALS **SPORT EVENTS** **SUMMER FESTIVALS**
SPECIAL SALES CAMPAIGN **GALERIES** MARKETS ROADSHOWS
FASHION SHOWS CATERING CONGRESSES **MARRIAGES**
CITY FESTIVALS STORAGE SHELTER GASTRONOMY
ROOFING CANTEENS **SALES ROOM** **LOCKER BAR DORM**
WORKSHOP PRODUCTION THEATRE CLUB ENTERTAINMENT

CONVINCING SYSTEM

The modular design of RÖDER P-TENTS is effective and efficient thanks to the wide range of possible uses. The tent and hall systems provide the right space solution for every requirement and every occasion.

EFFECTIVELY AND EFFICIENT



» MULTI-FACETED AND HARMONIOUS

RÖDER P-TENTS are the solution for atmospheric and convincing moments.



CREATIVE AND APPEALING



» ONE VISION - VARIOUS SOLUTIONS

RÖDER P-TENTS are available in the variants Partytent, Hexagonal, Octagonal, Mega Uno, Mega Duo, Mega Terz, Mega Quattro, Bodega and Bodega SP.



VARIANTS

1. Party tent
Spans
3,0 m | 4,0 m | 6,0 m
8,0 m | 9,0 m | 10,0 m



2. Hexagonal
Spans
6,0 m | 8,0 m | 9,0 m



3. Octagonal
Span
10,0 m




4. Mega Uno
Spans
6,0 m | 8,0 m | 9,0 m



5. Mega Duo
Spans
8,0 m | 9,0 m



6. Mega Terz
Spans
6,0 m | 8,0 m | 9,0 m

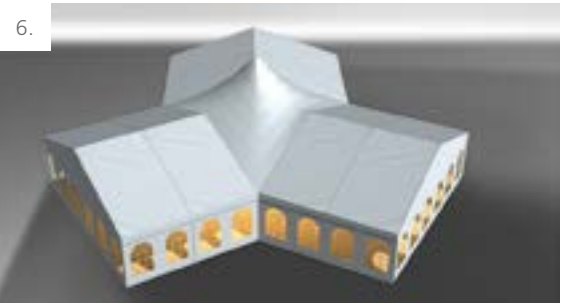


7. Mega Quattro
Span
6,0 m | 8,0 m



8. Bodega
Spans
3,0 m | 4,0 m | 6,0 m
8,0 m | 9,0 m | 10,0 m



9. Bodega SP
Spans
3,0 m | 4,0 m | 7,0 m

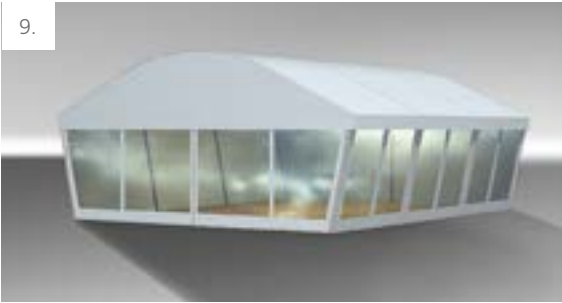

INFORMATION

All tent variations are available with different side panels. With the grid they are each about 3.0 m extendable. Individual spans, lengths, side heights and grid dimensions are possible as a special order. Detailed information is described in the technical data sheet on the following pages.





TECHNICAL
DATA




PARTY TENT

STANDARD VERSION						
Span	300 cm	400 cm	600 cm	800 cm	900 cm	1.000 cm
Side height	229 cm	229 cm	229 cm	229 cm	229 cm	229 cm
Ridge height	284 cm	301 cm	338 cm	374 cm	392 cm	411 cm
Roof pitch	20°	20°	20°	20°	20°	20°
Bay distance / grid	300 cm	300 cm	300 cm	300 cm	300 cm	300 cm
Longest component	350 cm	430 cm	350 cm	430 cm	490 cm	540 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm				94 x 48 x 3 mm	
Gable column	0	0	1	1	2	2
Corner connections	Stem bolts					
Min. setup length	600 cm			600 cm 1.200 cm with portals		
Max. setup length	Expandable with the grid					
Max. wind speed according to EN	80 km/h					
Special design	<ul style="list-style-type: none">• Elimination of anchoring by the installation of a steel-aluminum floor with ballast or use of the compact floor• Elimination of the side bandage scissors through the installation of portals					
Further extension possibilities	Economy extension		Hexagonal with intermediate fields single and on both sides Tents of Mega series		Octagonal with intermediate fields single and on both sides Tents of Mega series	
Fußboden	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette floor• Compact floor					
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204					




300/229/284 & 400/229/301

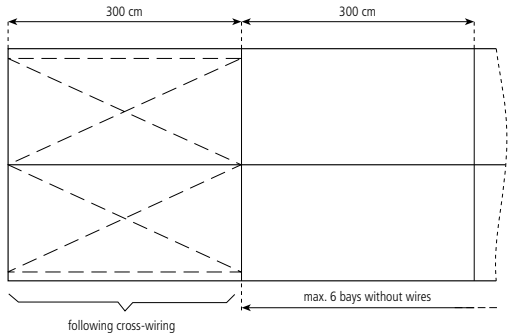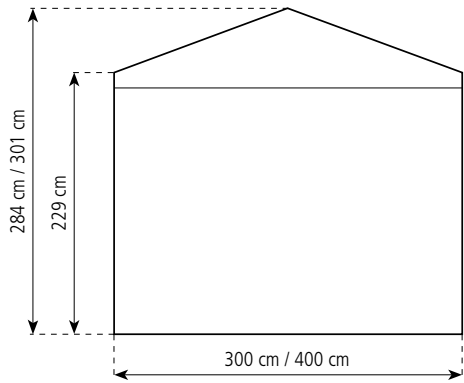

600/229/338 & 800/229/374

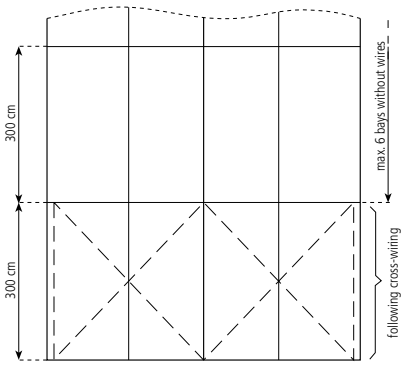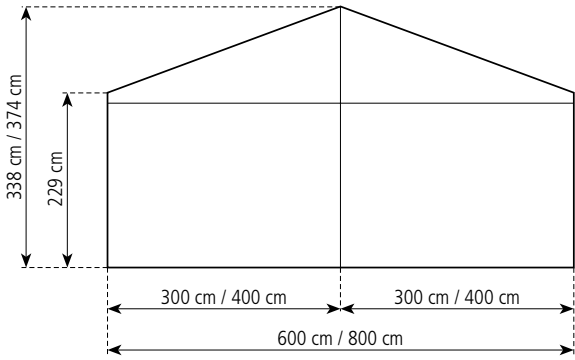

900/229/392 & 1.000/229/411

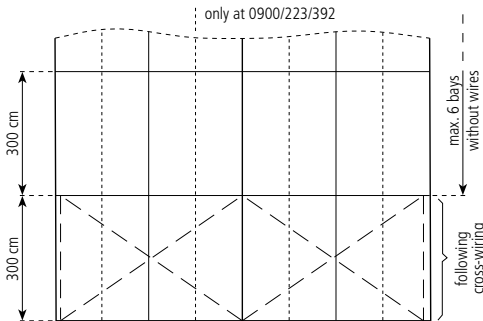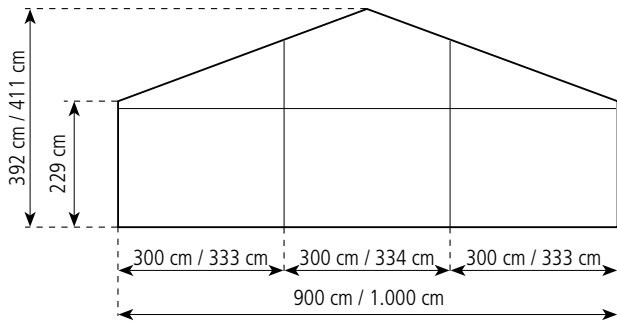

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL DATA

HEXAGONAL

STANDARD VERSION			
Span	600 cm	800 cm	900 cm
Seitenhöhe	229 cm	229 cm	229 cm
Ridge height pavilion roof	338 cm	374 cm	392 cm
Ridge height membrane roof	488 cm	521 cm	557 cm
Roof pitch	20°	20°	20°
Covered area	23,4 m²	41,6 m²	52,0 m²
Longest component	330 cm	430 cm	483 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm		
Corner connections	Stem bolts		
Max. wind speed according to EN	80 km/h		
Roof	Roof tarpaulin with bungee tensioning, white		
Special design	Elimination of anchorage when using the compact floor		
Attachment option	Can be used as pavilion roof with intermediate fields (see Party tent 0600/229/338 and 0800/229/374)		
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette flooringAluminium frame with non slip plywood or aluminum hollow platesCompact floor		
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204		

600/229/338 & 800/229/374 & 900/229/392

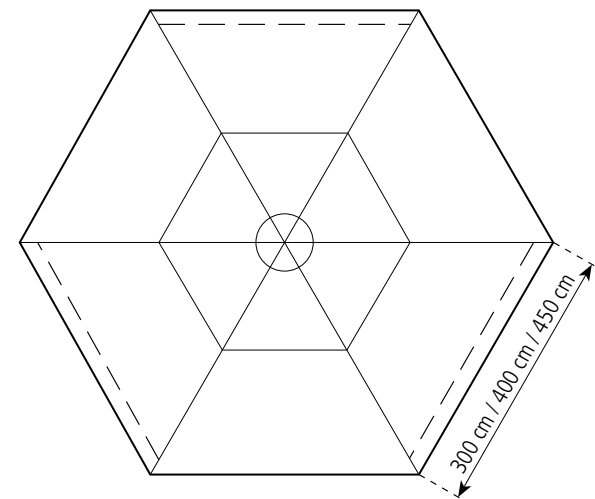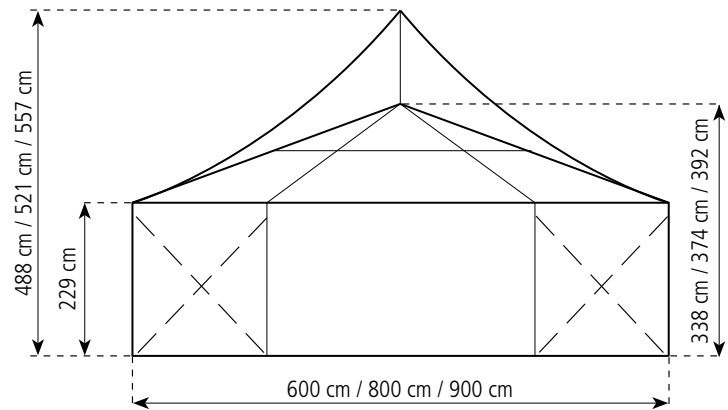

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL
DATA

OCTAGONAL

STANDARD VERSION	
Span	1.000 cm
Side height	229 cm
Side length	382 cm
Ridge height pavilion roof	411 cm
Ridge height membrane roof	561 cm
Roof pitch	20°
Covered area	70,2 m²
Longest component	540 cm
Main profile	94 x 48 x 3-4 mm
Corner connections	Stem bolts
Max. wind speed according to EN	80 km/h
Special design	Elimination of wind cross-wiring by installation of portals
Attachment option	Can be used as pavilion roof with intermediate fields (see Party tent 1.000/229/411)
Floor	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette floor• Compact floor
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204

1.000/229/382

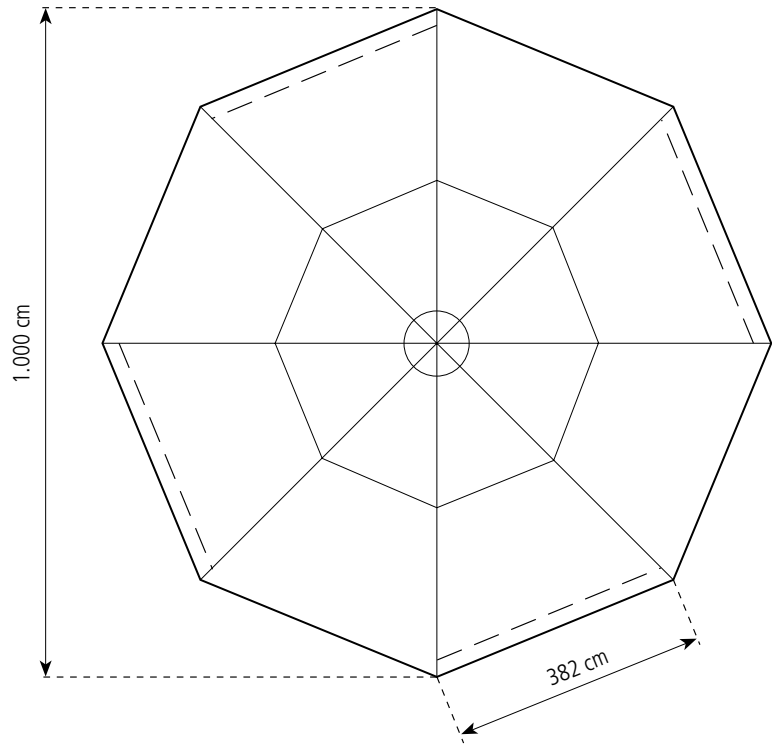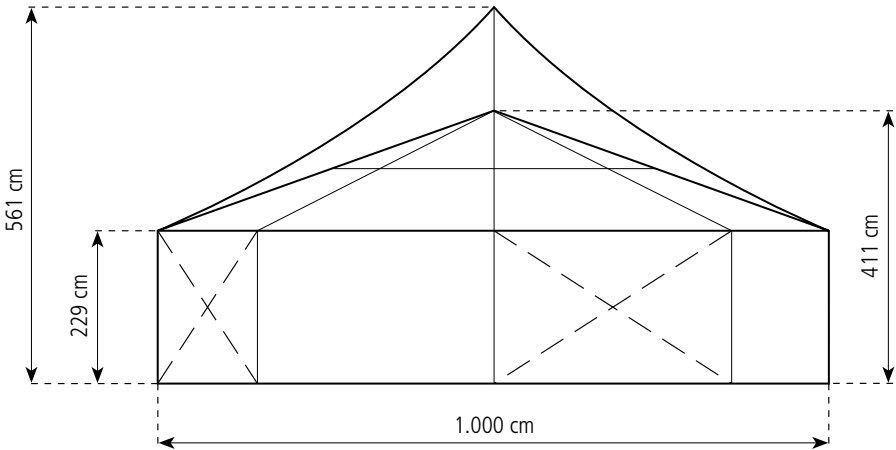

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL DATA

MEGA UNO

STANDARD VERSION			
Span	600 cm	800 cm	900 cm
Side height	229 cm	229 cm	229 cm
High point	488 cm	524 cm	392 cm
Ridge height	338 cm	374 cm	560 cm
Gable column	1	1	1
Roof pitch	20°	20°	20°
Min. setup length			1.200 cm
Max. setup length	Expandable with the grid		
Longest component	321 cm	428 cm	483 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm		
Corner connections	Stem bolts		
Max. wind speed according to EN	80 km/h		
Special design	Elimination of wind cross-wiring by installation of portals		
Attachment option	<ul style="list-style-type: none">• ½ Hexagonal at gable ends• Economy extension		
Floor	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette floor• Compact floor		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		

600/229/338 & 800/229/374 & 900/229/392

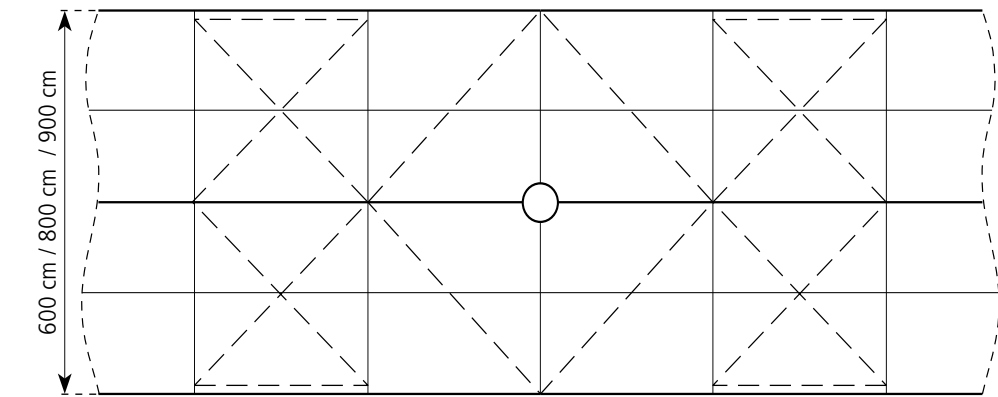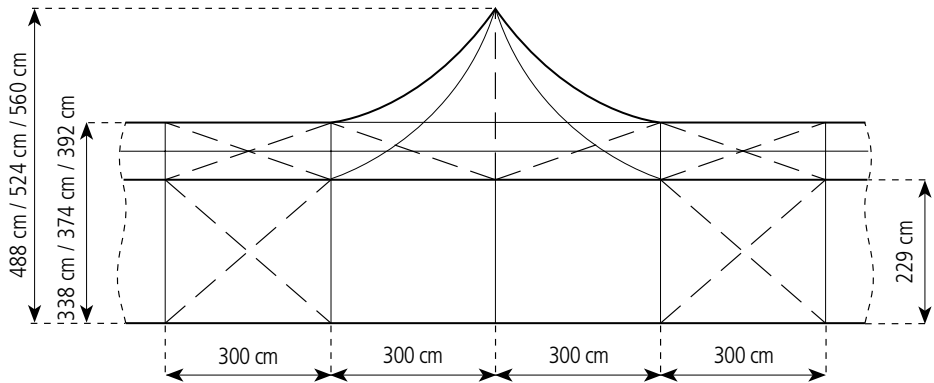

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL DATA

MEGA DUO


STANDARD VERSION		
Span	800 cm	900 cm
Side height	229 cm	229 cm
Ridge height	374 cm	389 cm
Roof pitch	20°	20°
Bay distance / grid	300 cm	300 cm
Longest component	428 cm	481 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	
Corner connections	Stem bolts	
Min. setup length	Min. 1 connection field in each destination	
Max. setup length	Expandable with the grid in each destination	
Max. wind speed according to EN	80 km/h	
Roof	Roof tarpaulin with bungee tensioning, white	
Special design	<ul style="list-style-type: none">All Mega tents fit to 600, 800 and 900 cm RÖDER standard-Party tentElimination of wind cross-wiring by installation of portals	
Attachment option	<ul style="list-style-type: none">½ Hexagonal at gable endsTents of the Mega series 600 and 800 cm	
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette floorCompact floor	
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204	

800/229/374 & 900/229/389

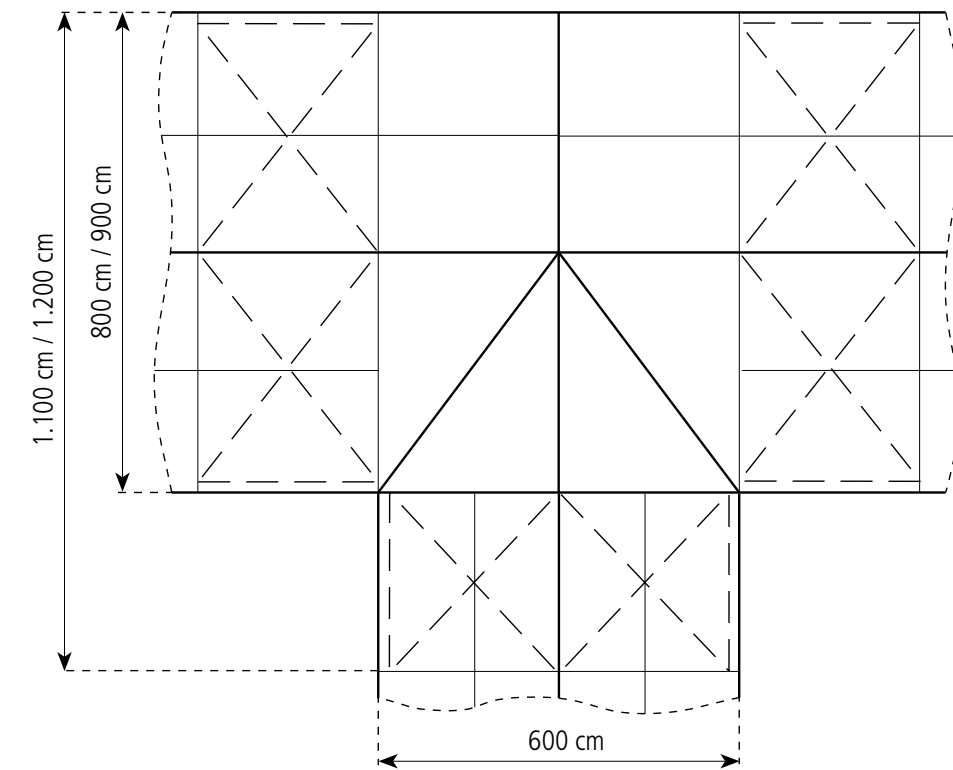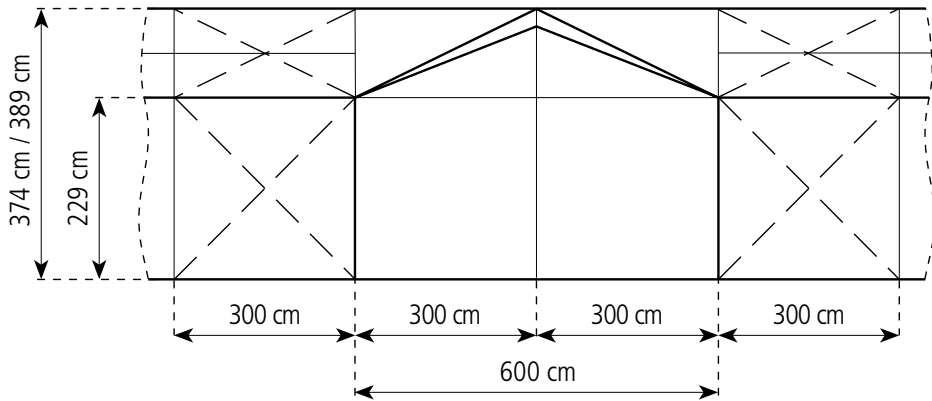

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.


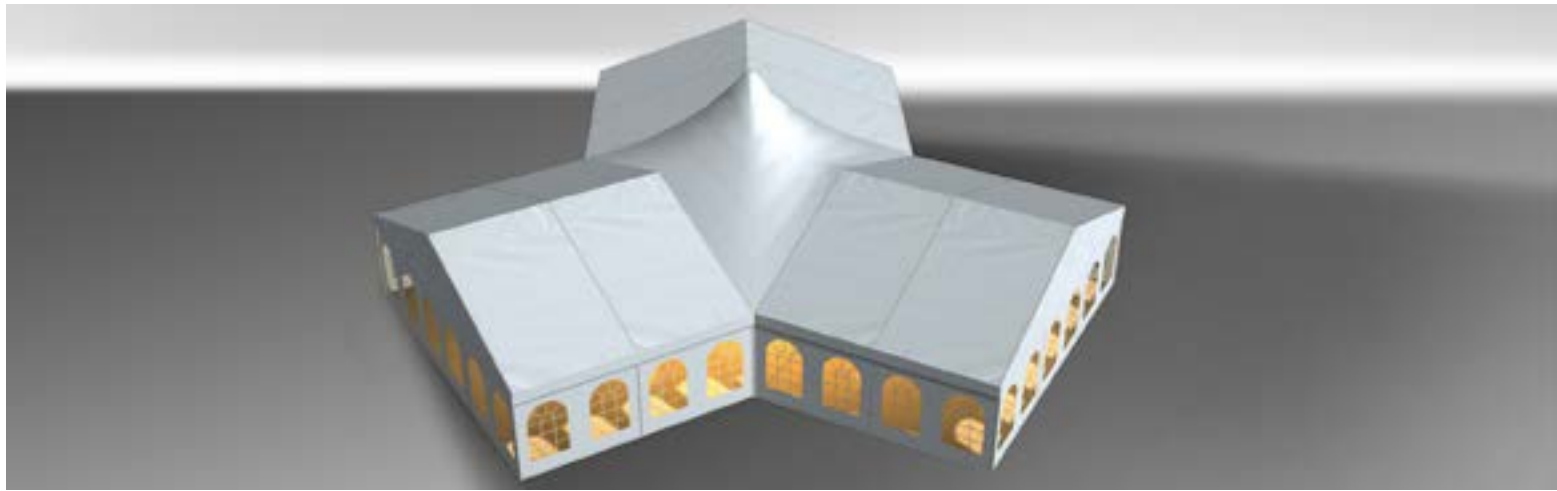


TECHNICAL DATA

MEGA TERZ

STANDARD VERSION			
Span	600 cm	800 cm	900 cm
Side height	229 cm	229 cm	229 cm
Ridge height	338 cm	374 cm	389 cm
High point	488 cm	524 cm	587 cm
Gable column	1	1	1
Roof pitch	20°	20°	20°
Bay distance / grid	300 cm	300 cm	300 cm
Min. setup length	Min. 1 connection field in each destination		
Max. setup length	Expandable with the grid in each destination		
Longest component	322 cm	430 cm	481 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm		
Corner connections	Stem bolts		
Max. wind speed according to EN	80 km/h		
Special design	Elimination of wind cross-wiring by installation of portals		
Attachment Option	<ul style="list-style-type: none">• ½ Hexagonal at gable ends• Economy extension		
Floor	<ul style="list-style-type: none">• Cassette floor		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		

600/229/338 & 800/229/374 & 900/229/389

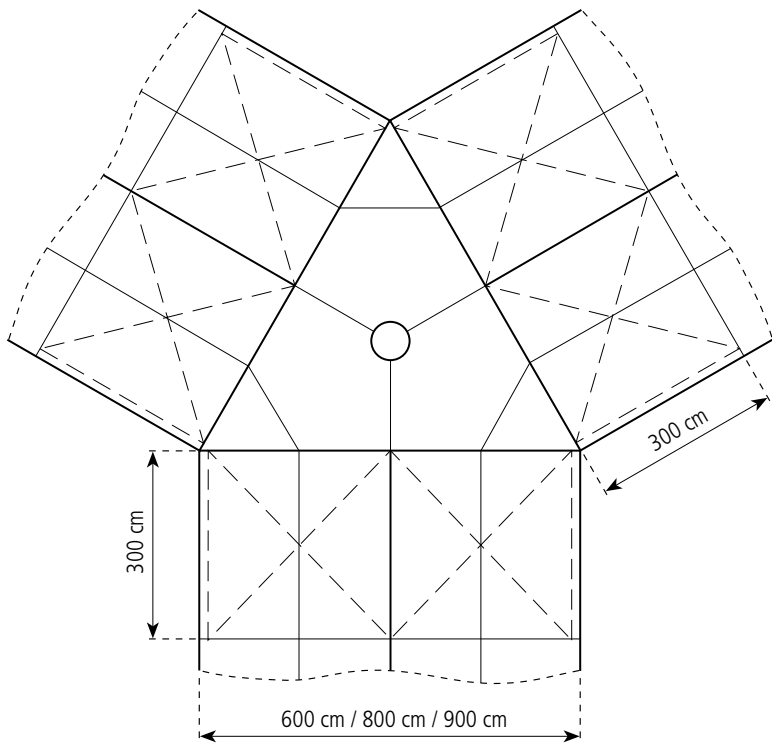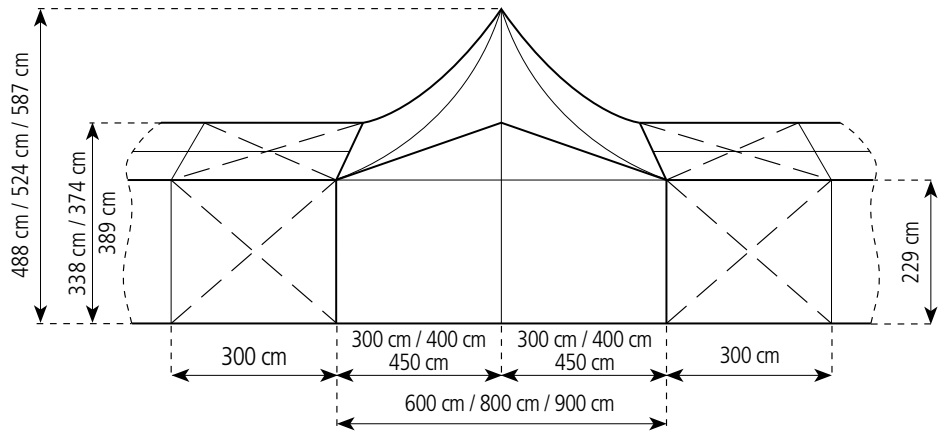

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL DATA

MEGA QUATTRO

STANDARD VERSION

Span	600 cm	800 cm
Side height	229 cm	229 cm
Ridge height	338 cm	374 cm
High point	493 cm	566 cm
Gable column	1	1
Roof pitch	20°	20°
Bay distance / grid	300 cm	300 cm
Min. setup length	Min. 1 connection field in each destination	
Max. setup length	Expandable with the grid in each destination	
Longest component	430 cm	430 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	
Corner connections	Stem bolts	
Max. wind speed according to EN	80 km/h	
Special design	Elimination of wind cross-wiring by installation of portals	
Attachment option	<ul style="list-style-type: none">• ½ Hexagonal at gable ends• Economy extension	
Floor	<ul style="list-style-type: none">• Cassette floor	
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204	

600/229/338 & 800/229/374

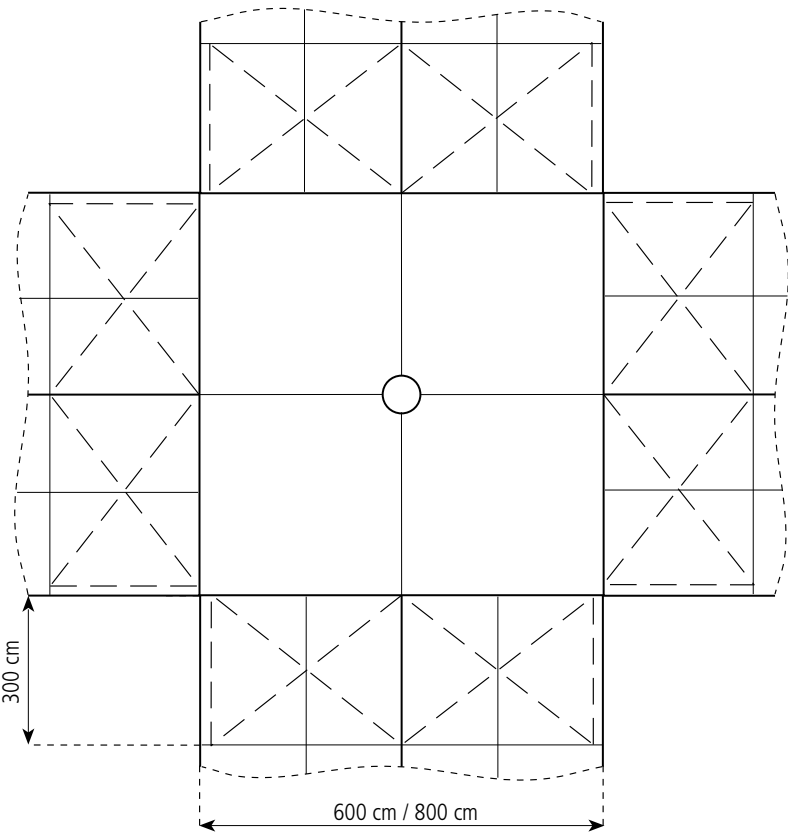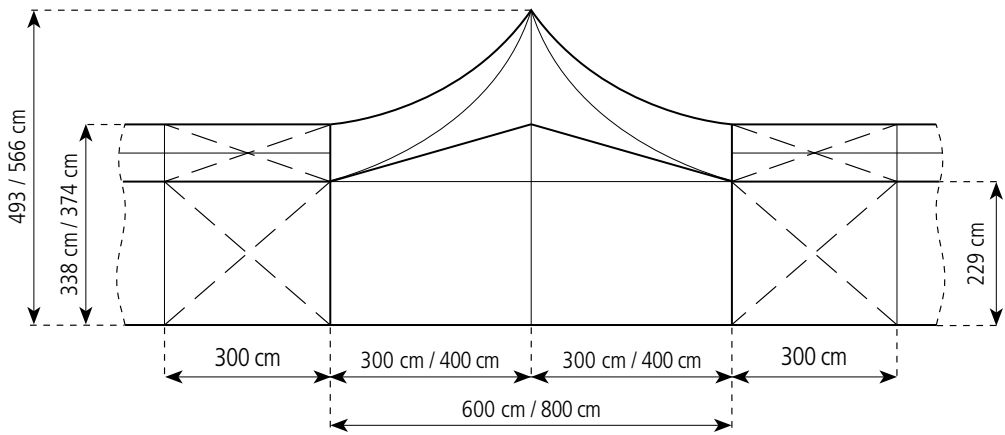

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.




TECHNICAL
DATA

BODEGA


STANDARD VERSION

Span	300 cm	400 cm	600 cm	800 cm	900 cm	1.000 cm
Side height	229 cm	229 cm	229 cm	229 cm	229 cm	229 cm
Ridge height	275 cm	306 cm	327 cm	374 cm	397 cm	420 cm
Bay distance / grid	300 cm	300 cm	300 cm	300 cm	300 cm	300 cm
Longest component	350 cm	350 cm	350 cm	440 cm	500 cm	550 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3-5 mm					
Gable column	0	0	1	1	2	2
Corner connections	Stem bolts					
Min. setup length	600 cm					
Max. setup length	Expandable with the grid					
Max. wind speed according to EN	80 km/h					
Roof	Roof tarpaulin with bungee tensioning, white					
Special design	Elimination of the side bandage scissors through the installation of portals					
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette floorCompact floor					
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204					

300/229/275 & 400/229/306

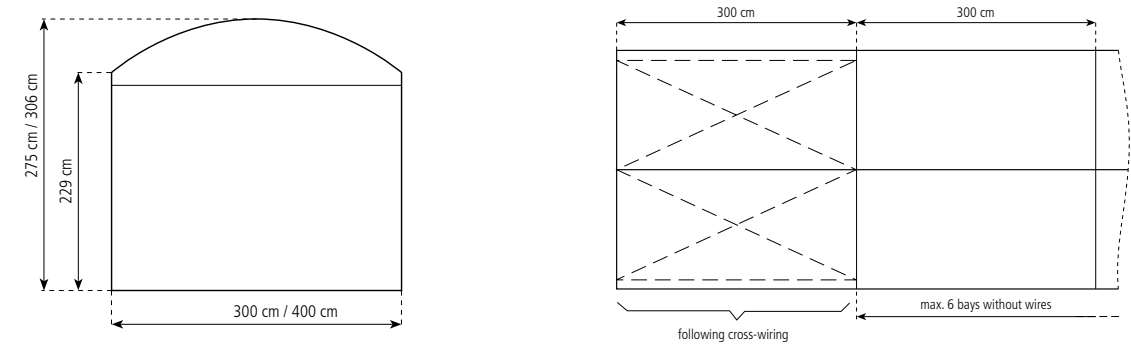


600/229/327 & 800/229/374 & 900/229/397 & 1.000/229/420

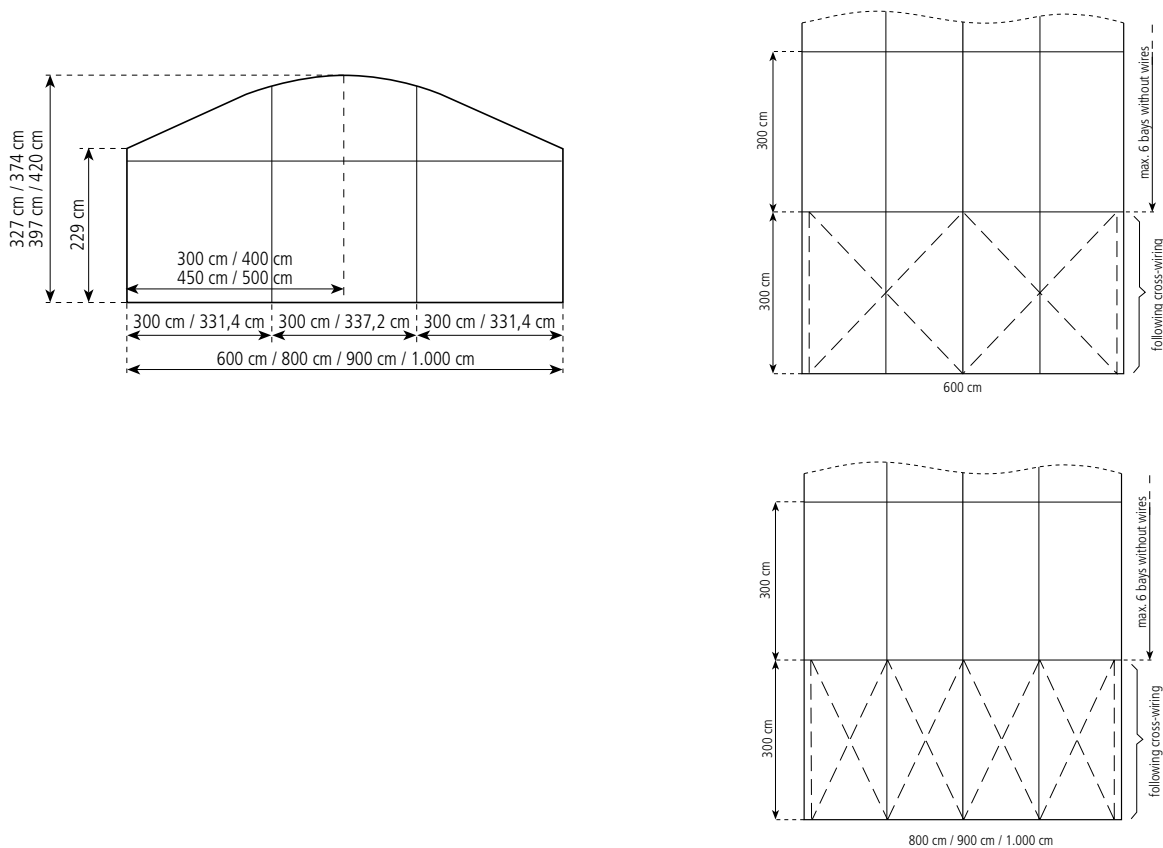

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.

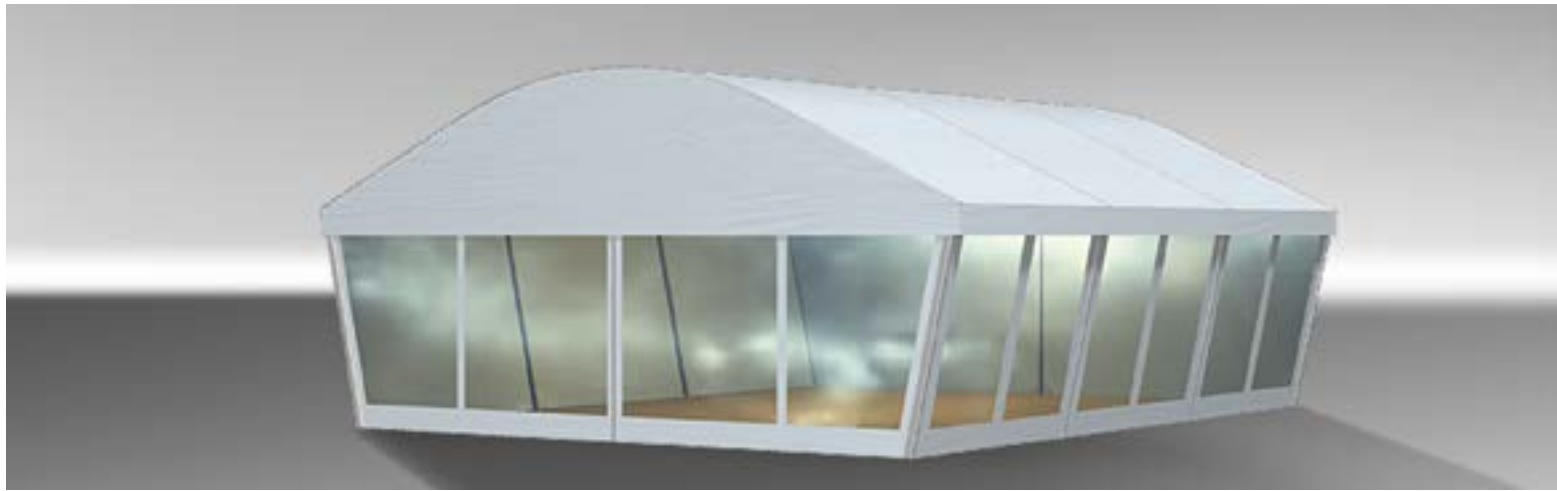


TECHNICAL DATA


BODEGA SP

STANDARD VERSION			
Span	300 cm	400 cm	700 cm
Width at eaves	400 cm	500 cm	800 cm
Side height	229 cm	229 cm	229 cm
Ridge height	300 cm	306 cm	376 cm
Bay distance / grid	300 cm	300 cm	300 cm
Longest component	220 / 479 cm	479 cm	406 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3-5 mm		
Gable column	1	1	2
Corner connections	Stem bolts		
Min. setup length	600 cm		
Max. setup length	Expandable with the grid		
Max. wind speed according to EN	80 km/h		
Roof	Roof tarpaulin with bungee tensioning, white		
Special design	<ul style="list-style-type: none">Elimination of the side bandage scissors through the installation of portals		
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette floorCompact floor		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		


300-400/229/300

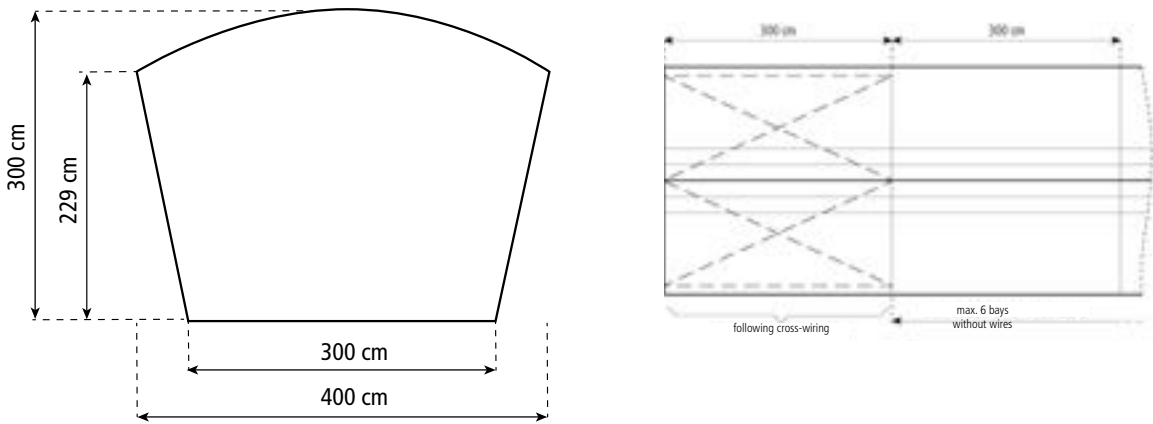

400-500/229/306

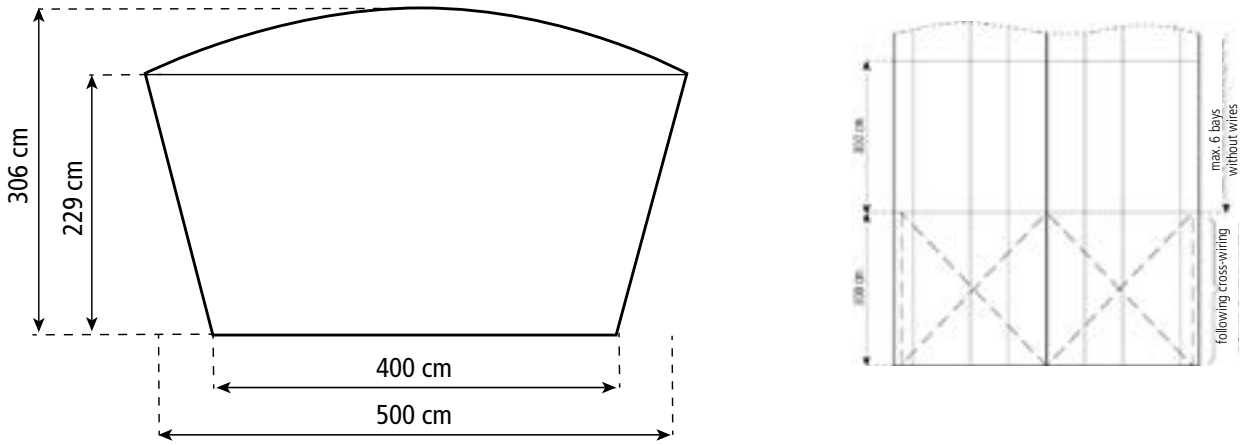

700-800/229/376

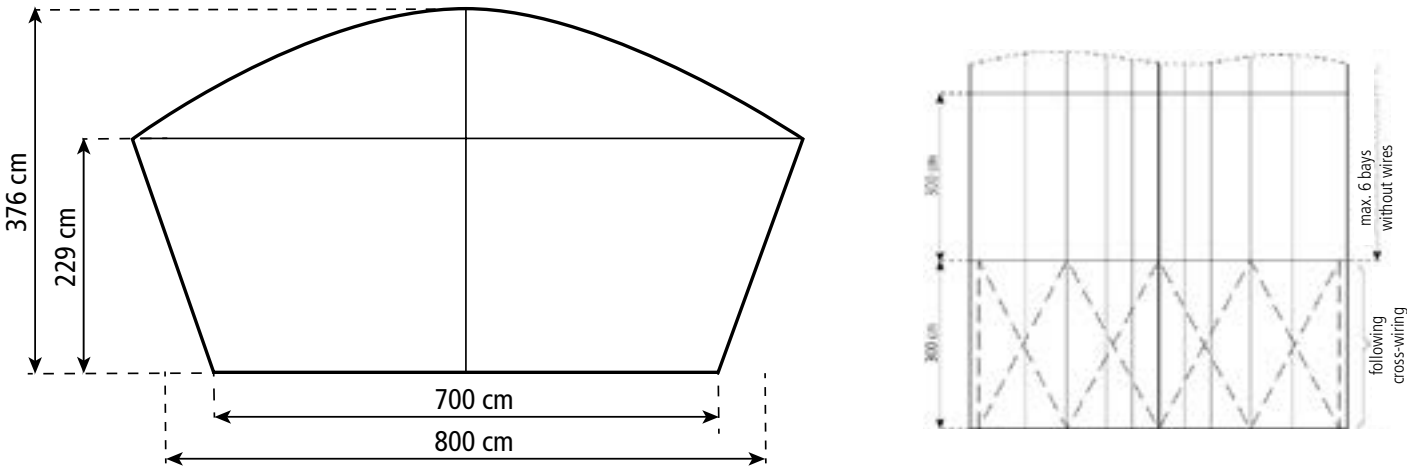

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.



EQUIPMENT FEATURES

FLEXIBLE AND MODULAR

ROOM SOLUTIONS FOR THE WORLD

The RÖDER P-TENTS can be quickly and easily assembled and disassembled by stable and solid connection elements. The well-designed combination of supporting and connecting elements guarantees a proven high level of structural stability. Many optional pieces of equipment and tent components can be added to the standard scope of delivery. Everything from the floor system, framework, terraces, galleries, cladding right up to the roof tarpaulins can all be customised to make the tent and marquee systems individual. RÖDER P-TENTS are flexible and modular by its extensive equipment options.



1. Stability

RÖDER guarantees a high level of stability on almost any terrain for example by ballastable floor system instead of pegs.



2. Four-Channel profile system

Due to the four-channel profile system different anchorage systems (fixing claws) can be mounted. This allows the use of exclusive accessories such as the fixing of lighting systems, fire extinguishers, brochure stands, nettles, interior gables, etc.

3. Connection elements

Plug-in elements and self-locking rocker pins enable a quick and easy installation.

4. Wind bracing cross

Easy and fast installation through the rigid and stable wind bracing cross.

5. Facade systems, roof and side tarpaulins

Impressive atmosphere through transparent roof and side tarpaulins, glass and aluminum facades or the innovative clamping frame facades.

INCLUDED IN DELIVERY

Frame construction with anodised aluminium profiles

White roof tarpaulins with fixed or bungee tensioning

White side tarpaulins with central divisions

Pegs for ground fixing

Setup tube and tarpaulin mounting rope

SPECIAL EQUIPMENT

Windows for the side tarpaulins

Various floor and facade systems

Various ways of setting up or remodeling the tents

Arch-shaped bars instead of wind bracing cross in sides

Different door, tarpaulin and facade systems

Ground bars for the side tarpaulins

Fixed anchors for the roof tarpaulins

Interior decoration and lighting

DESCRIPTION OF FRAME MATERIAL

Inspection log and transfer approval

Anodized aluminium profile with four- or two-channel profile system

Eave purlins and towel holder made of anodized square profile

Connecting elements made of galvanised steel

Statics calculated by EN 13782

DESCRIPTION OF TARPAULIN MATERIAL

RÖDER No. 1, PVDF-coated tarpaulin manufactured according to DIN 18204

Classified as ‘difficult to ignite’ by DIN 4102 and EN 13501

Dirt-repellent and light-resistant


Lets daylight through and is UV-resistant

Low-wick coated polyester threads



VISION AND MISSION RÖDER TENT AND HALL SYSTEMS



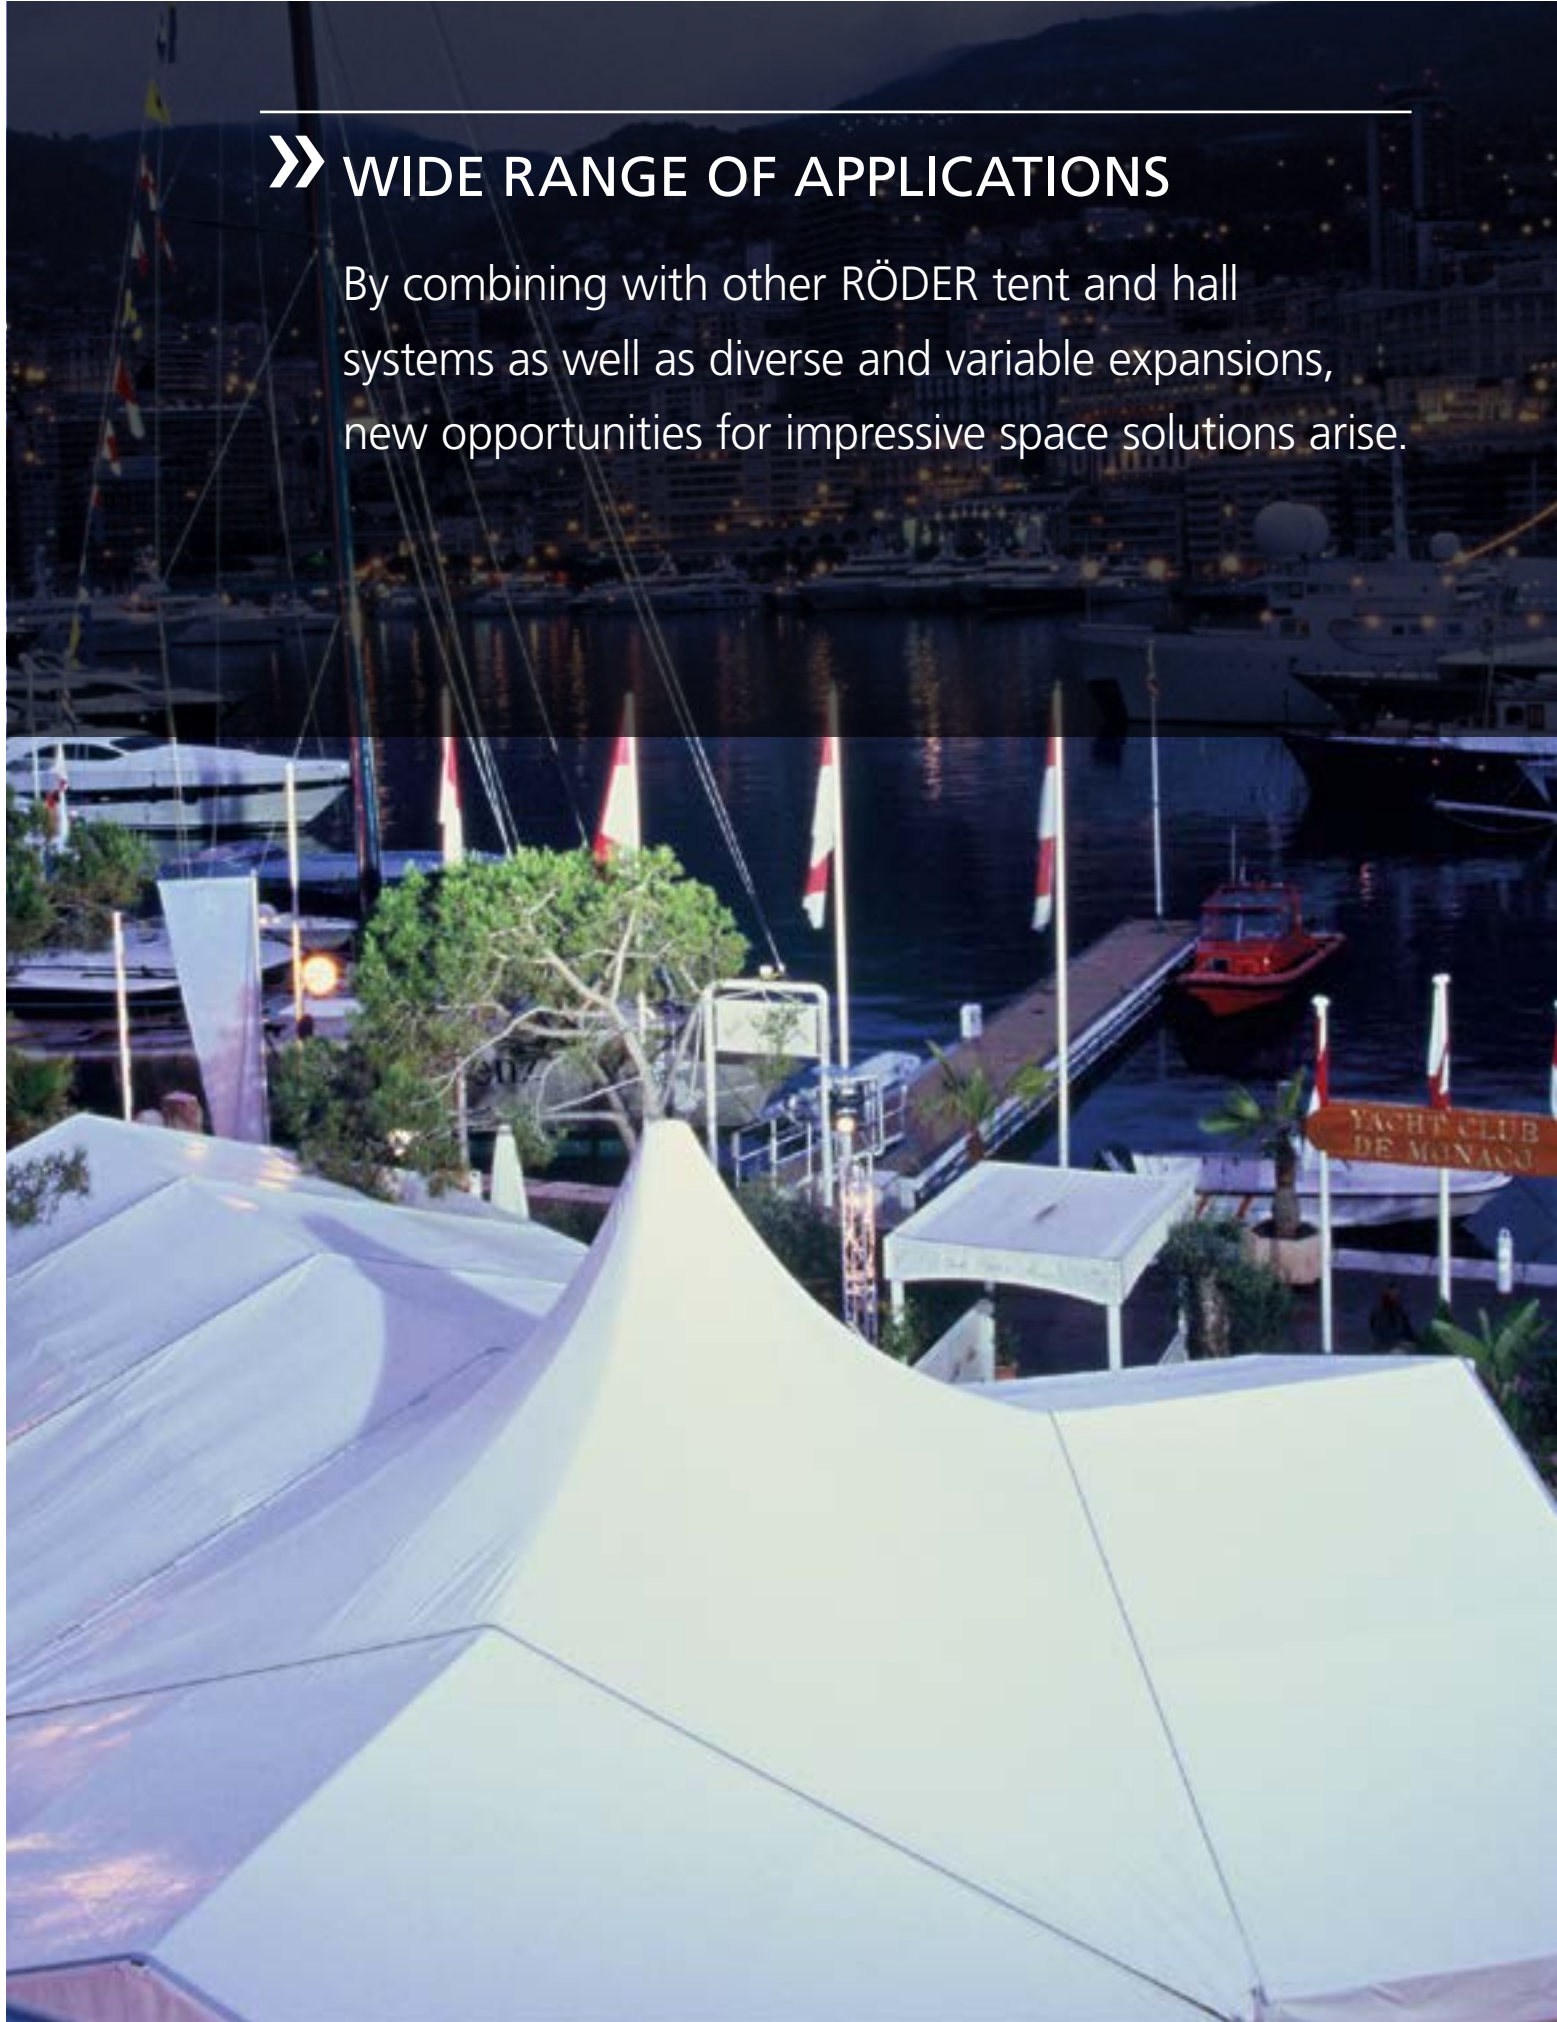

» WIDE RANGE OF APPLICATIONS

By combining with other RÖDER tent and hall systems as well as diverse and variable expansions, new opportunities for impressive space solutions arise.

FULL-SERVICE



TARPAULINS & FACADE SYSTEMS



FLOOR SYSTEMS



STAIRS, BALCONIES, GALERIES & RAILINGS



SECURITY SYSTEMS



LIGHTING



KITCHEN & SANITARY INSTALLATIONS



INTERIOR, CLADDING & DECORATION



FENCE, SEPARATION & FLAG SYSTEMS

DIVERSE AND VARIABLE



HEATING & AIR CONDITIONING SYSTEMS



DOOR & GATE SYSTEMS

DURABLE AND
HIGH-QUALITY



TECHNICAL FEATURES

DECADES OF EXPERIENCE

The RÖDER Group uses only the most qualified staff, the best materials and constantly draws on its decades of experience in the field of temporary accommodation – right from the very start of the construction and production process of the tent and marquee systems. We achieve high customer satisfaction through quality and safety. Continuous and reliable quality management means we can place our trust in the materials we use. The RÖDER Group is certified according to the European standards EN ISO 9001:2008 and EN ISO 14001:2009. All structures are calculated and tested in accordance with the European standard EN 13782.

1.



2.



1. Construction

The modular design principle allows various types of construction and expansion.

2. Equipment

RÖDER offers many exclusive types of facades and equipment to go with its tent and marquee systems.

3. Logistics

Specialist partners take on the task of transporting the tent and marquee systems. As a trusted and known dispatcher, RÖDER benefits from a fast-track customs clearance process. This guarantees a just-in-time availability worldwide.

3.



4.



4. Production

RÖDER production is respectful to both people and the environment – worldwide.

The anodised aluminium frame is equipped with highly secure profiles and has two- or four-channel keder technology. The sophisticated keder technology makes it possible to expand the tents in many different ways – using the modular design principle. The keder technology also provides protection against bad weather and storms. Highly secure aluminium alloys and galvanized steel guarantee a long-life hold.

RÖDER conducts the planning in line with the minimum quality standards laid down by the DIN 18204 product certification. The long-life RÖDER No.1 tarpaulins are equipped with polyester threads that have a special low-wick and PVDF coating. This increases their resistance against bad weather, prevents dirt building up on the surface and damp getting through. The tarpaulins are classified as ‘difficult to ignite’ by the standards DIN 4102 and EN 13501, are resistant against fungus and spores (fungicidal), and are UV-proof.

The tents guarantee easy handling as they are quick and easy to set up, do not take up much storage or transport space, and the highly secure aluminium profiles are lightweight. The installation and dismantling of the tents will not demand too much manpower or incur high costs.



ISO 9001:2008
ISO 14001:2009
REGISTERED FIRM

QUALITY MANAGEMENT

ENGINEERED IN GERMANY

IN ALL PROCESSES, WE ENSURE THAT THE HIGHEST QUALITY AND SAFETY STANDARDS ARE COMPLIED WITH IN ORDER TO PROTECT OUR CUSTOMERS AND TO OFFER THEM THE BEST-LOOKING PRODUCT WITH THE BEST MATERIALS. THIS IS WHY QUALITY, SAFETY AND DURABILITY ARE FIRM COMPONENTS OF RÖDER'S COMPANY CULTURE.

In order to optimise production and business processes and to maintain all safety guidelines so as to guarantee product quality and customer satisfaction, the RÖDER Group employs consistent, sustainable and thorough quality management. The concept of our quality management is based on internal and external input. All relevant processes are defined and documented – from the design phase, material selection and project planning right up to when the tent and marquee systems are given to the customers. As a high-end manufacturer, 'Engineered in Germany' and 'Made by RÖDER' is our promise of quality to our customers. Both our design expertise and quality management are therefore pivotal for the success of our products and trust of our customers.

The quality management systems, which are tested and certified in accordance with the **European standards EN ISO 9001:2008** and **EN ISO 14001:2009**, relate to the design, construction, production, sale and hiring out of RÖDER tent and marquee systems. In order to guarantee the quality promised by the RÖDER Group, all members of staff take part in regular external and internal training on quality and safety. All our temporary accommodation is inspected by TÜV in terms of construction, structure and the tarpaulins. In addition, the company receives external advice and supervision from Bavarian-based company inspectors, the **LGA (Landesgewerbeamt Bayern)**.



» GUARANTEED THE RIGHT SPACE
SOLUTION



SUSTAINABLE AND
ECOLOGICAL



BENEFITS AND ADDED VALUE OVERVIEW

FOUR-CHANNEL PROFILE SYTSEM WITH WIND BRACING CROSS
EXTENSIVE ACCESSORIES
SOLID AND RELIABLE CONNECTION ELEMENTS
EASY AND QUICK INSTALLATION
EXPANDABLE WITH MODULAR DESIGN
FACADES AND FLOOR SYSTEMS
EXCELLENT VALUE FOR MONEY DIFFERENT SIDE COVERS
EXCLUSIVE RECONSTRUCTION VARIANTS
EXPERT ADVICE IN ALL PHASES OF THE PROJECT
CERTIFIED QUALITY AND SAFETY
EXTENSIVE SERVICE AND SERVICE-SUPPLY OFFER
DIVERSE APPLICATION POSSIBILITIES
MANY YEARS OF EXPERTISE OF QUALIFIED EMPLOYEES
FLEXIBLE AND MODULAR EQUIPMENT
ENGINEERED AND MADE IN GERMANY
DURABLE AND HIGH QUALITY MATERIALS
A TENT AND HALL SYSTEMS OF RÖDER

RÖDER WORLDWIDE

- Headquarters
- RÖDER subsidiary with its own production facilities and rental warehouse
- RÖDER subsidiary with its own rental warehouse
- RÖDER Sales office
- RÖDER Partner

GERMANY (HEADQUARTERS)

RÖDER
Zelt- und Veranstaltungsservice GmbH
Am Lautenstein, 63654 Büdingen
Fon + 49 60497000
Fax + 49 6049700339
info@roder.com
www.roder.com

1

ALGERIA (PARTNER)
ASTALAVISTA SARL
06, Rue Abd El Kader Guellati
Cinq Maisons, El Mohammadia,
Alger
Fon + 213 21525738
Fax + 213 21525737
info@roder.com
www.astalavista-dz.com

2

ARGENTINA (PARTNER)
Roggerone SRL,
Av. Santa Fé 2665-1640 Martinez,
Pcia de Buenos Aires, Argentina
Fon + 54 1147925422
Fax + 54 1147934113
info@roder.com
www.roggerone.com

3

AUSTRIA (SUBSIDIARY)
RÖDER Zelte Austria
Gartenstraße 30a
AT-4201 Gramastetten, Austria
Fon + 43 7239 70024
Fax + 43 7239 70024
info@roder.com
www.roder.com

4

AUSTRALIA (PARTNER)
H-Line Structures Australia
P.O. Box 8009, Toowoomba
AU-4350 Queensland, Australia
Fon + 61 754451300
Fax + 61 754458027
info@roder.com
www.hlinestructures.com.au

5

CHILE (PARTNER)
Bodegajes Temporales Limitada
Patricia Viñuela 578-C
CL-Lampa Santiago, Chile
Fon + 56 27385638
Fax + 56 27385639
info@roder.com
www.btcbodegajes.cl

6

CHINA-PEKING (SUBSIDIARY)
RODER Tent Service
(Beijing) CO., Ltd
Rm. 311 Sanchuan Dasha
3 Hepingli Xijie, Chaoyang Qu
100013 BEIJING, P. R. China
Fon + 86 10644055-71 | -72
Fax + 86 1064405219
info@roder-china.com
www.roder-china.com

7

CHINA-SHANGHAI (SUBSIDIARY)
RÖDER Tent Service
(Shanghai) CO., Ltd
No. 3978 Hu Qingping Road,
Qingpu district, CN-201703
Shanghai, China
Fon + 86 2151099228
Fax + 86 21398126 07
info@roder-china.com
www.roder-china.com

8

COLOMBIA (PARTNER)
Bodegajes Temporales Colombia S.A.S
Cr 7 71 Torre B floor 9
Bogotá, Colombia
Fon + 57 3115870731
celeon@btcbodegajes.com.co
www.btcbodegajes.cl

9

CZECH REPUBLIC (PARTNER)
Diamant Expo
Marie Kršňákové 119
403 17 Chabařovice, Czech Republic
Fon + 42 04752147934
Fax + 42 0475214793
info@roder.com
www.roeder.cz

10

FINLAND (PARTNER)
Siirtohallit Oy
Puusepäntie 11
04360 Tuusula
Finland
Fon +35 8400913913
info@roder.com
www.siirtohallit.fi

11

FRANCE (SUBSIDIARY)
RÖDER France SARL
ZI No. 2 · 28, Allée Monge
FR-60 000 Beauvais, France
Fon + 33 344028877
Fax + 33 344053926
info@roder.fr
www.roder.com

12

GREECE (PARTNER)
Con.Tent Ltd.
Kifissias Avenue 198
GR-15231 Halandra-Athens, Greece
Fon + 30 2106754720
Fax + 30 2106754722
info@roder.com
www.con-tent.gr

13

HUNGARY (SUBSIDIARY)
RÖDER GmbH Magyarországi
Közvetlen Kereskedelmi, Képviselete
Széchenyi tér 21-23 III/6
HU-6900 Makó,
Hungary | Magyarország
Fon + 36 62212071
Fax + 36 62212071
info@roder.com
www.roeder.hu

14

ITALY (SUBSIDIARY)
RÖDER Italia SRL
Via Stazione 27/a
IT-39042 Bressanone, Italy
Fon + 39 0472830939
Fax + 39 0472832909
info@roder.com
www.roder.com

15

MALAYSIA (PARTNER)
Sebsat Malaysia Sdn Bhd
Lot 50321, Jalan KPB 1,
Kawasan Perindustrian Budiman
Batu 10 3/4, 43200 Cheras, Selangor,
Malaysia
Fon + 60 390802640
Fax + 60 390801640
ceo_sebsat@yahoo.com
www.roder.com

16

MOROCCO (PARTNER)
Grand Chapiteau
15, rue Oued Sebou Agdal
1000 Rabat - Maroc
Fon + 33 344028877
Fon + 33 344053926
info@roder.fr
www.roder.com

17

MEXICO (SUBSIDIARY)
Roeder de México S.A. de C.V.
Mariano Escobedo # 193
Torre Norte, Of. 1304
Col. Anáhuac I Secc.,
Del. Miguel Hidalgo C.P. 11320 - México D.F.
Fon + 52 7282823845
info@roder.com
www.roder.com.mx

18

NEW ZEALAND (PARTNER)
H-Line Structures
9A Taylor Rd
NZ-Papamoa, Bay of Plenty 3118,
New Zealand
Fon + 61 754451300
Fax + 61 754458027
info@roder.com
www.hlinestructures.com.au

19

PERU (PARTNER)
Btp Almacenes S.A.C
Ricardo Palma 1250
Miraflores – Lima, Perú
Fon + 51 948902070
info@roder.com
www.btcbodegajes.cl

20

ROMANIA (PARTNER)
Str. Buzesti Nr. 61, Et. 7,
Ap. 48-49, Sector 1,
RO-011013 Bukarest, Romania
Fon + 40 213110011
Fax + 40 213110011
info@roder.com
www.roeder.ro

21

RUSSIAN FEDERATION (SUBSIDIARY)
RÖDER OOO
Solnechnogorskiy district,
Village Lunevo, Garazhnaya street
opposite No. 16
RU-141580 Moskau, Russia
Fon + 7 4957858157
Fax + 7 4957858158
roder@roder.ru
www.roder.ru

22

SLOVENIA (PARTNER)
Expo Biro d.o.o.
Miklavška cesta 57
SL-2311 Hoce, Slovenia
Fon + 38 624805800
Fax + 38 62480580 20
info@roder.com
www.expobiro.si

23

SPAIN (PARTNER)
Foro Técnico S.L., Orient 78-84
ES-08172 St. Cugat del Valles
Barcelona, Spain
Fon + 34 935441860
Fax + 34 935441861
info@roder.com
www.forotec.com

24

SWEDEN (PARTNER)
One4Event AB
Hemgatan 2
SE-78473 Borlänge, Sweden
Fon + 46 243794360
Fax + 46 243794369
info@roder.com
www.one4event.com

25

SWITZERLAND (SUBSIDIARY)
Orgatent AG
Gewerbe Badhus
CH-6022 Grosswangen,
Switzerland
Fon + 41 419804939
Fax + 41 419804919
info@orgatent.ch
www.orgatent.ch

26

TURKEY (SUBSIDIARY)
RÖDER Yapi Sistemleri
Sanayi Ticaret Ltd. Sti
Akasya Acıbadem
Çeçen Sokak, Kent Etabı A Kule Kat:18 D:62
TR-34660 Üsküdar/Istanbul, Turkey
Fon + 90 2163408910
Fax + 90 2163408915
info@roder.com.tr
www.roder.com.tr

27

UKRAINE (PARTNER)
Tent Plettac Ltd.
Plodova Str., 1
UA-4128 Kyiv, Ukraine
Fon + 38 0444000461
Fax + 38 0444222145
info@tent-plettac.com
www.tent-plettac.com

28

UNITED KINGDOM (SUBSIDIARY)
RÖDER UK Ltd.
Unit 16 Earith Business Park
Meadow Drove, Earith,
Cambridgeshire
GB-PE28 3QF, United Kingdom
Fon + 44 1487840840
Fax + 44 1487840843
sales@roderuk.com
www.roderuk.com

29

USA (PARTNER)
Anchor Industries Inc.
1100 Burch Dr., P.O. Box 3477 Evansville,
Indiana 47733, USA
Fon + 1 8128672421
Fax + 1 8128670547
info@roder.com
www.anchorinc.com

30

19

5

7

8

16

11

21

22

28

13

2

17

24

12

4

26

23

1

10

29

15

27

14

25

3

6

9

18

20

2

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1

1



RÖDER ZELT- UND VERANSTALTUNGSSERVICE GMBH
AM LAUTENSTEIN, 63654 BÜDINGEN (GERMANY)

FON +49 6049 700 0
FAX +49 6049 700 339

INFO@RODER.COM
WWW.RODER.COM

